

FIG. 2

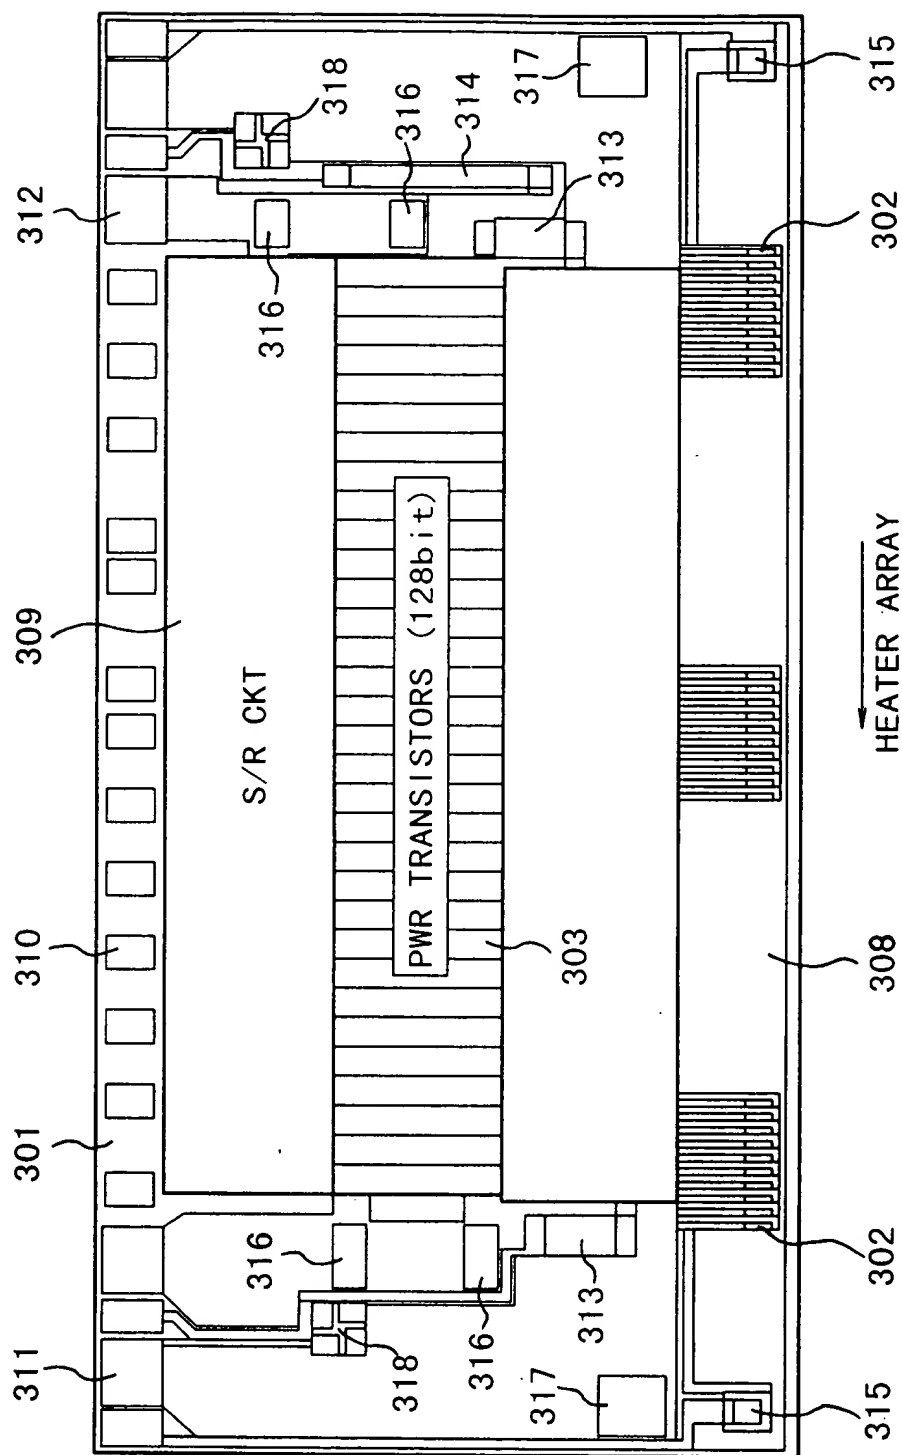


FIG. 3

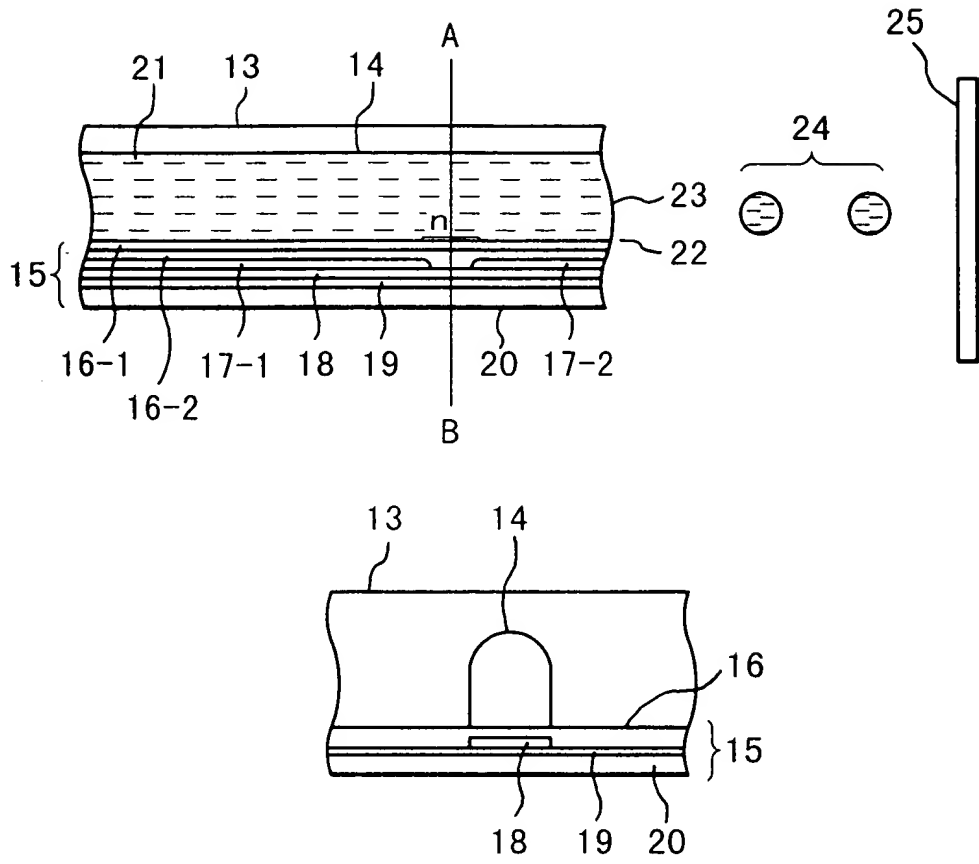


FIG. 4

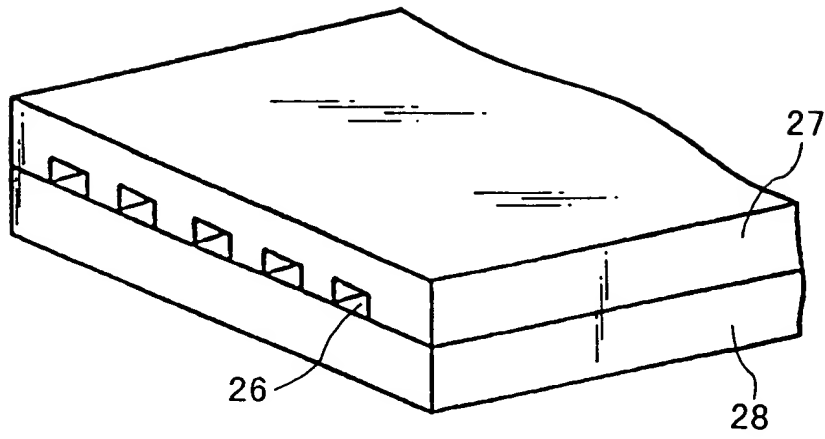


FIG. 5

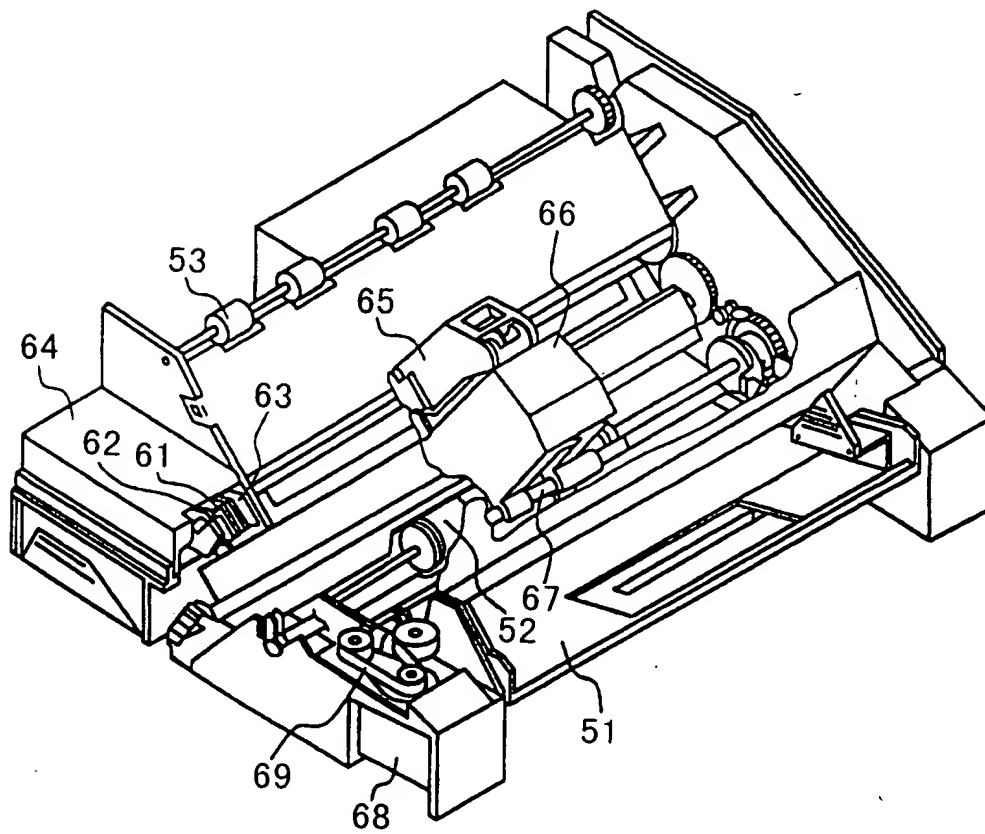
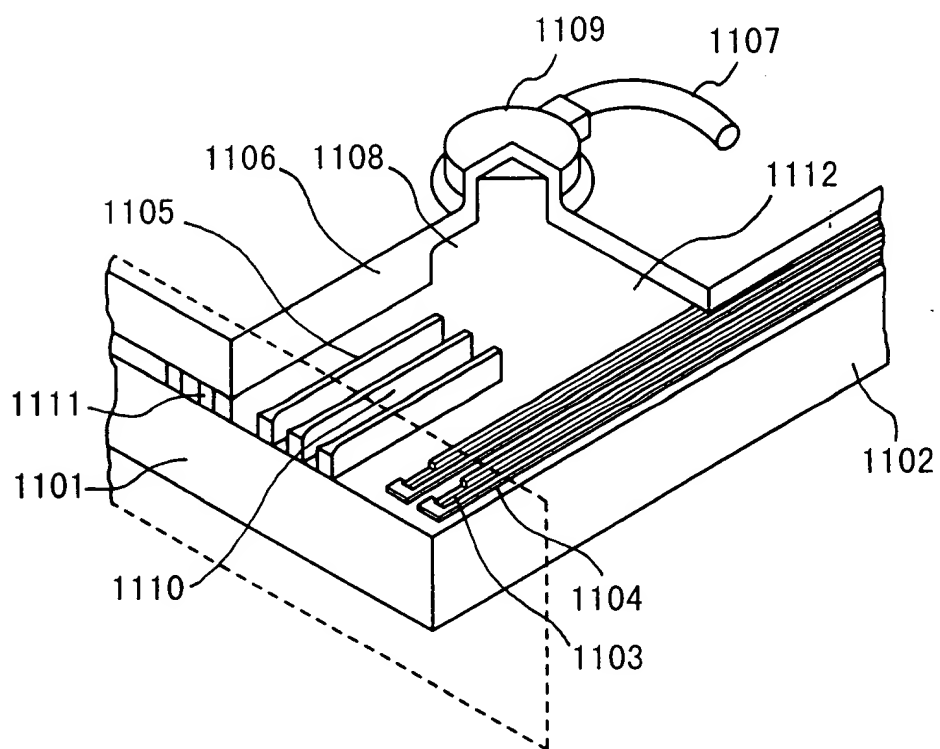
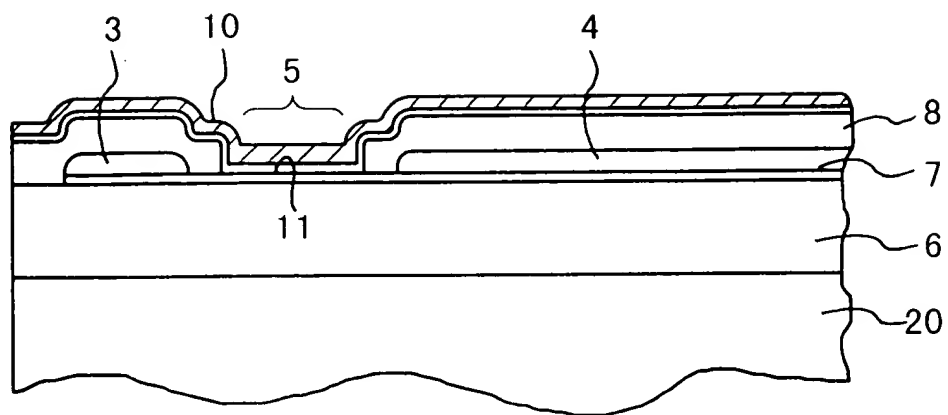


FIG. 6

Figure 1 is a perspective view of a rectangular electronic device 70. The device has a front face with a recessed area containing a rectangular component 72. A cable 71 is connected to the side of the device.

FIG. 9




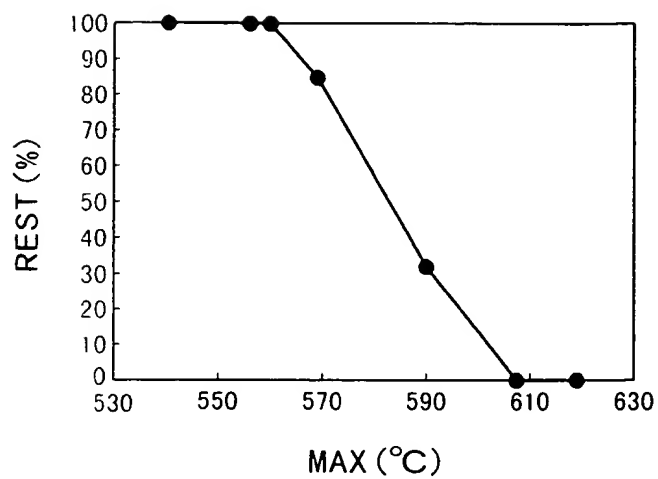


FIG. 14

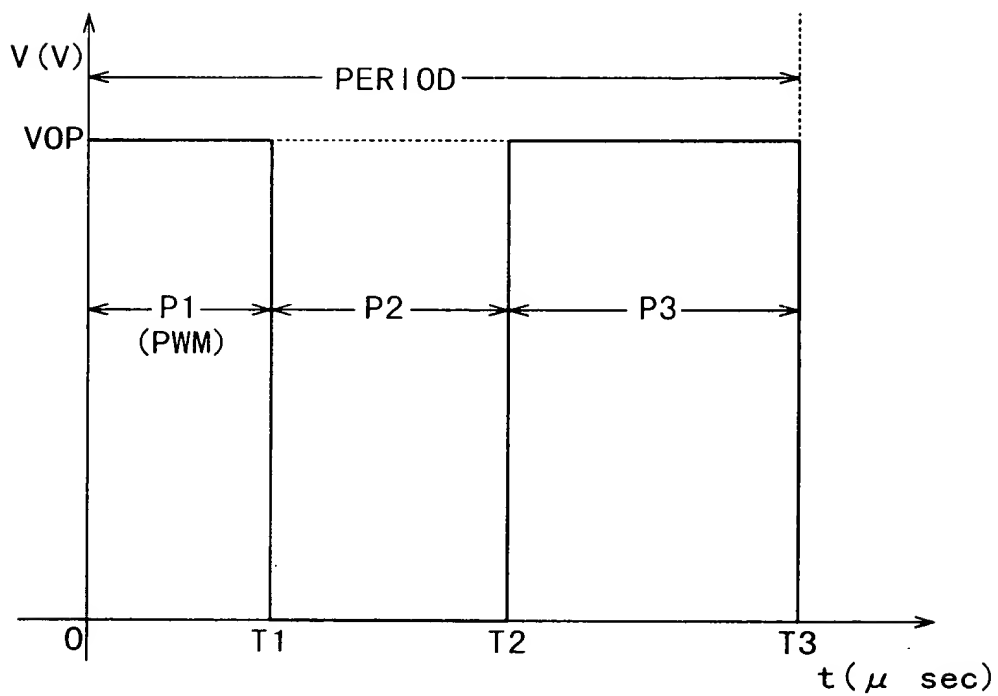

P1: PR-HEAT PLS (=T1) [WITH PWM]
P2: INTRVL (=T2-T1)
P3: MAIN HEAT PLS (=T3-T2)
VOP: DRIVING VOL

FIG. 15

FIG. 16